

FENCING TOOLS

อุปทรณ์ติดตั้งสำหรับรั้วไฟฟ้า



TL-CRE

Professional Crimping Tool

• Durable ferrule crimping tool



₱ TL-RAT1/2

Half Inch Rachet

• For the Hybrid BB heavy duty tensioner

ENERGIZER ENCLOSURES

ตู้เท็บเครื่องทำเนิดผลังงาน



® ENC-SB/WIZ

Metal Enclosure

- Powder coated metal enclosure with an inspection window
- Available in two sizes:
 - (h) 56cm x (w) 31cm x (d) 20cm



® ENC-SB/STEAL TH

Metal Enclosure

- Powder coated metal enclosure with an inspection window
- Available in two sizes:
 - (h) 61cm x (w) 46cm x (d) 20cm



ENC-RL6D-P

Fibreglass Enclosure

- Weather proof plastic
- For coastal applications with a stainless steel latch
- (h) 45cm x (w) 30cm x (d) 8cm

P1/4





EARTH SOIKES

แท่งทราวน์สำหรับฝังลงดิน



• Copper earth spike with nuts and washer



CUT OUT SWITCH

คัตเอาต์ตัดต่อกระแสไฟฟ้า



EA-COS

• Isolates a section of fence to allow for easy maintenance and fault finding

WARNING DEVICES

อุปทรณ์แจ้งเตือน



№ EA-WRS2/N

Warning Signs

- Available in Nemtek branded or unbranded
- Custom-made version available to order
- UV protected for long life
- Wire clips on the warning sign reduce installation time
- Custom-made version available
- Compliance requirements, every 10 m and change of direction
- IEC 60335-2-76 compliance



SR-FL/HVL4

Warning Signs

- Install it on your electric fence to indicate power status for peace of mind
- One directional viewing angle, allowing the light to shine into the secure area only. The status is not visible to external areas
- Working voltage between 3 kV and 12 kV approximately
- Dual stage design allows the intensity on the light to increase as the voltage on the fence increases, giving a better indication of how much voltage is on the fence
- Can be installed between any earth and live wires
- Can be used with most electric fence energisers


P2/4





EARTH LOOPS AND BRIDGING WIRES

อุปทรณ์ Loop สายทราวน์ลวดไฟฟ้า และเชื่อมต่อ

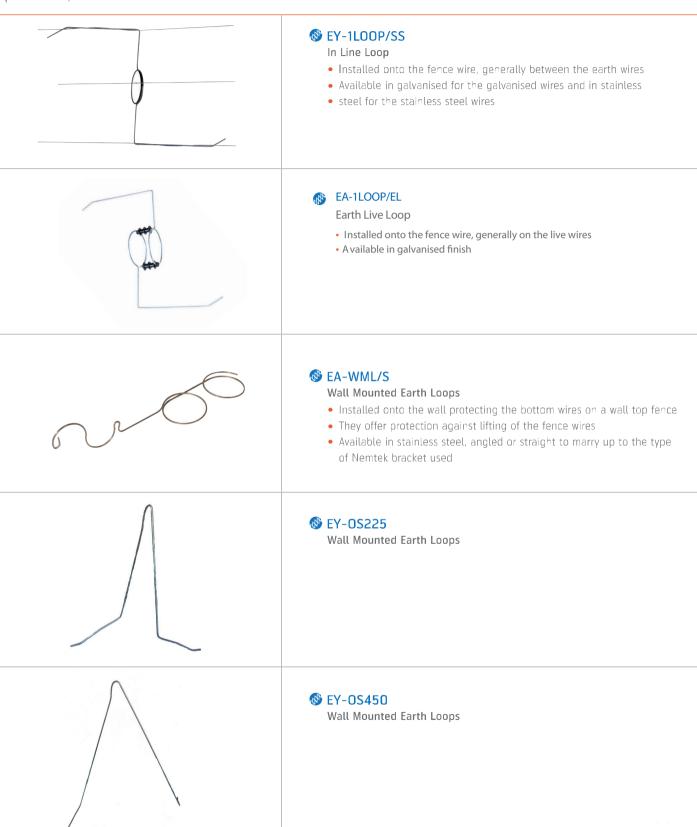



GATE CONTACTS

GATE CONTACTS

HEAVY DUTY SLIDING GATE CONTACT WITH AN OPTIONAL GALVANISED STEEL MOUNTING BRACKET

- Used for series wiring of the gate
- Suitable for any sliding gate
- Robust construction using stainless steel and brass, making it suitable for outdoor use in most climates
- Large location plates allow for increased tolerance



BATTERY



₱ PE7-12R

Battery

• Power : 12V 7.2 Ah 14.6 -15.6V. • Cycle use : 13.6 -13.8V. Standby use :

Initial Current : less than 2.6 amperes 6 x 15 x 9 CM Dimension:

SIREN



Indoor siren with optical and acoustical signaling

- acoustical signaling: piezo transducer
- optical signaling: ultra bright LEDs
- tamper protection against opening and removing from mounting surface